

**ebm-papst St. Georgen GmbH & Co. KG**

Hermann-Papst-Str. 1

D-78112 St. Georgen

Phone +49 (0) 7724 81-0

Fax +49 (0) 7724 81-1309

info2@de.ebmpapst.com

www.ebmpapst.com

Nominal data

Type	RL 65-21/14	
Nominal voltage	VDC	24
Nominal voltage range	VDC	12 .. 26.4
Speed	min ⁻¹	4500
Power input	W	14
Min. ambient temperature	°C	-20
Max. ambient temperature	°C	70
Air flow	m ³ /h	56
Sound power level	B	6.6

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



DC centrifugal compact fan

single inlet

Technical features


General description	Forward-curved impeller
Mass	0.170 kg
Dimensions	97 x 93.5 x 33 mm
Material of impeller	Fiberglass-reinforced plastic
Housing material	Scroll housing with fiberglass-reinforced plastic.
Direction of air flow	Axial air intake, centrifugal air exhaust out of the outlet.
Bearing	Ball bearings
Lifetime L10 at 40 °C	60000 h
Lifetime L10 at maximum temperature	30000 h
Connection line	With single strands AWG 26, TR 64
Motor protection	Protected against reverse polarity and locking.



DC centrifugal compact fan

single inlet

Product drawing

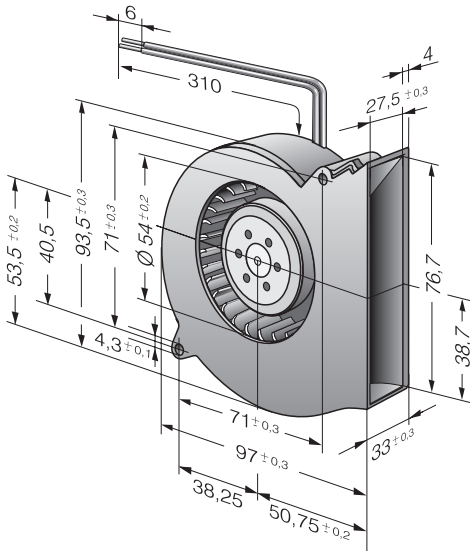

Charts: Air flow

