

FE2owlet


FN035-VD_.0F_.7P2

Leistungsdaten Performance data

3~ 400V ±10% Δ/Y 50Hz

P_1	0,19/0,14	kW
I	0,4/0,23	A
n	1390/1170	min ⁻¹
I_A	2,8/1,6	A
ΔI	0	%
t_R	70	°C


Kennliniendaten Characteristic data

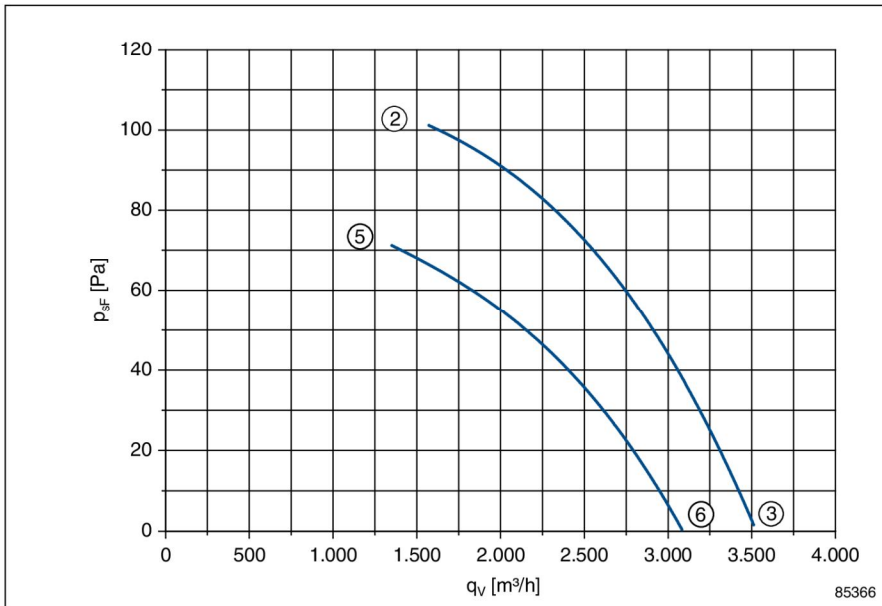

	U V	I A	P_1 W	n min ⁻¹
②	400	0,40	190	1390
③	Δ	0,37	150	1420
⑤	400	0,23	140	1170
⑥	Y	0,19	120	1240

$$p_{d2} = 4,7 \cdot 10^{-6} \cdot q_v^2$$

gemessen in Volldüse ohne
Berührschutz in Einbauart A
nach ISO 5801
*measured in full bell mouth without
guard grille in installation type A
according to ISO 5801*

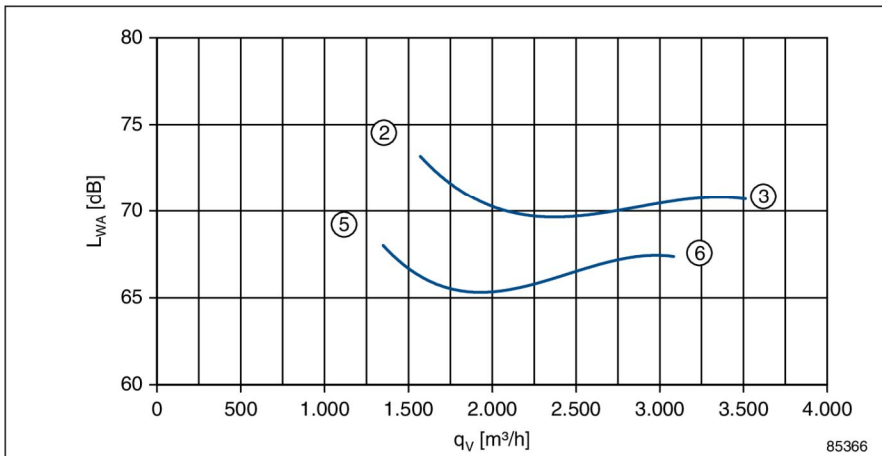

Maßblatt / Dimension sheet

Typ Type	Artikel-Nr. Article no.	Bauform Design	Luftförderrichtung Airflow direction	Gewicht Weight	Anschlussschaltbild Connection diagram	Maßblatt Dimension sheet	Seite Page
FN035-VDA.0F.A7P2	155885	A	A	4,0 kg	1360-108XB	L-KL-2741	
FN035-VDD.0F.A7P2	155886	D	A	4,8 kg	1360-108XB	L-KL-2743	
FN035-VDL.0F.A7P2	155887	L	A	6,8 kg	1360-108XB	L-KL-2745	
FN035-VDW.0F.A7P2	155888	W	A	5,0 kg	1360-108XB	L-KL-2748	
FN035-VDA.0F.V7P2	155889	A	V	4,0 kg	1360-108XA	L-KL-2742	
FN035-VDI.0F.V7P2	155890	I	V	4,7 kg	1360-108XA	L-KL-2744	
FN035-VDH.0F.V7P2	155891	H	V	6,8 kg	1360-108XA	L-KL-2746	
FN035-VDK.0F.V7P2	155892	K	V	5,3 kg	1360-108XA	L-KL-2747	
FN035-VDQ.0F.V7P2	155893	Q	V	7,9 kg	1360-108XA	L-KL-2811	